




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04B 7/005		A1	(11) International Publication Number: WO 00/36762
			(43) International Publication Date: 22 June 2000 (22.06.00)
(21) International Application Number: PCT/IB99/01936		(81) Designated States: BR, CA, CN, JP, MX, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).	
(22) International Filing Date: 6 December 1999 (06.12.99)			
(30) Priority Data: 60/111,954 11 December 1998 (11.12.98) US		Published <i>With international search report.</i>	
(71) Applicant: NORTEL NETWORKS CORPORATION [CA/CA]; World Trade Center of Montreal, 8th floor, 380 St. Antoine Street West, Montreal, Quebec H2Y 3Y4 (CA).			
(72) Inventors: HASHEM, Bassam; 10-6 Deerfield Drive, Nepean, Ontario K2G 3R6 (CA). SECORD, Norman; 22 Sherbrooke Drive, Ottawa, Ontario K1Y 1R7 (CA). LEE, Wookwon; 2604 Draper Avenue #1501, Ottawa, Ontario K2H 9B1 (CA).			

(54) Title: **SYSTEM AND METHOD TO COMBINE POWER CONTROL COMMANDS DURING SOFT HANDOFF IN DS/CDMA CELLULAR SYSTEMS**

(57) Abstract

Mobile stations in communication with several base stations in a cellular CDMA system (as when undergoing soft handoff) do not use the conventional "or of the downs" rule for assessing power control commands from base stations. Mobile stations assess the link quality of the links from the base station. If any base station displays link quality above a predetermined threshold and if that base station is requesting power reduction, power is reduced by a predetermined amount, delta. Otherwise, power is adjusted up or down by an amount less than or equal to delta according to the received power control signals from each base station in conjunction with a weight determined from the signal quality of the link from each base station.

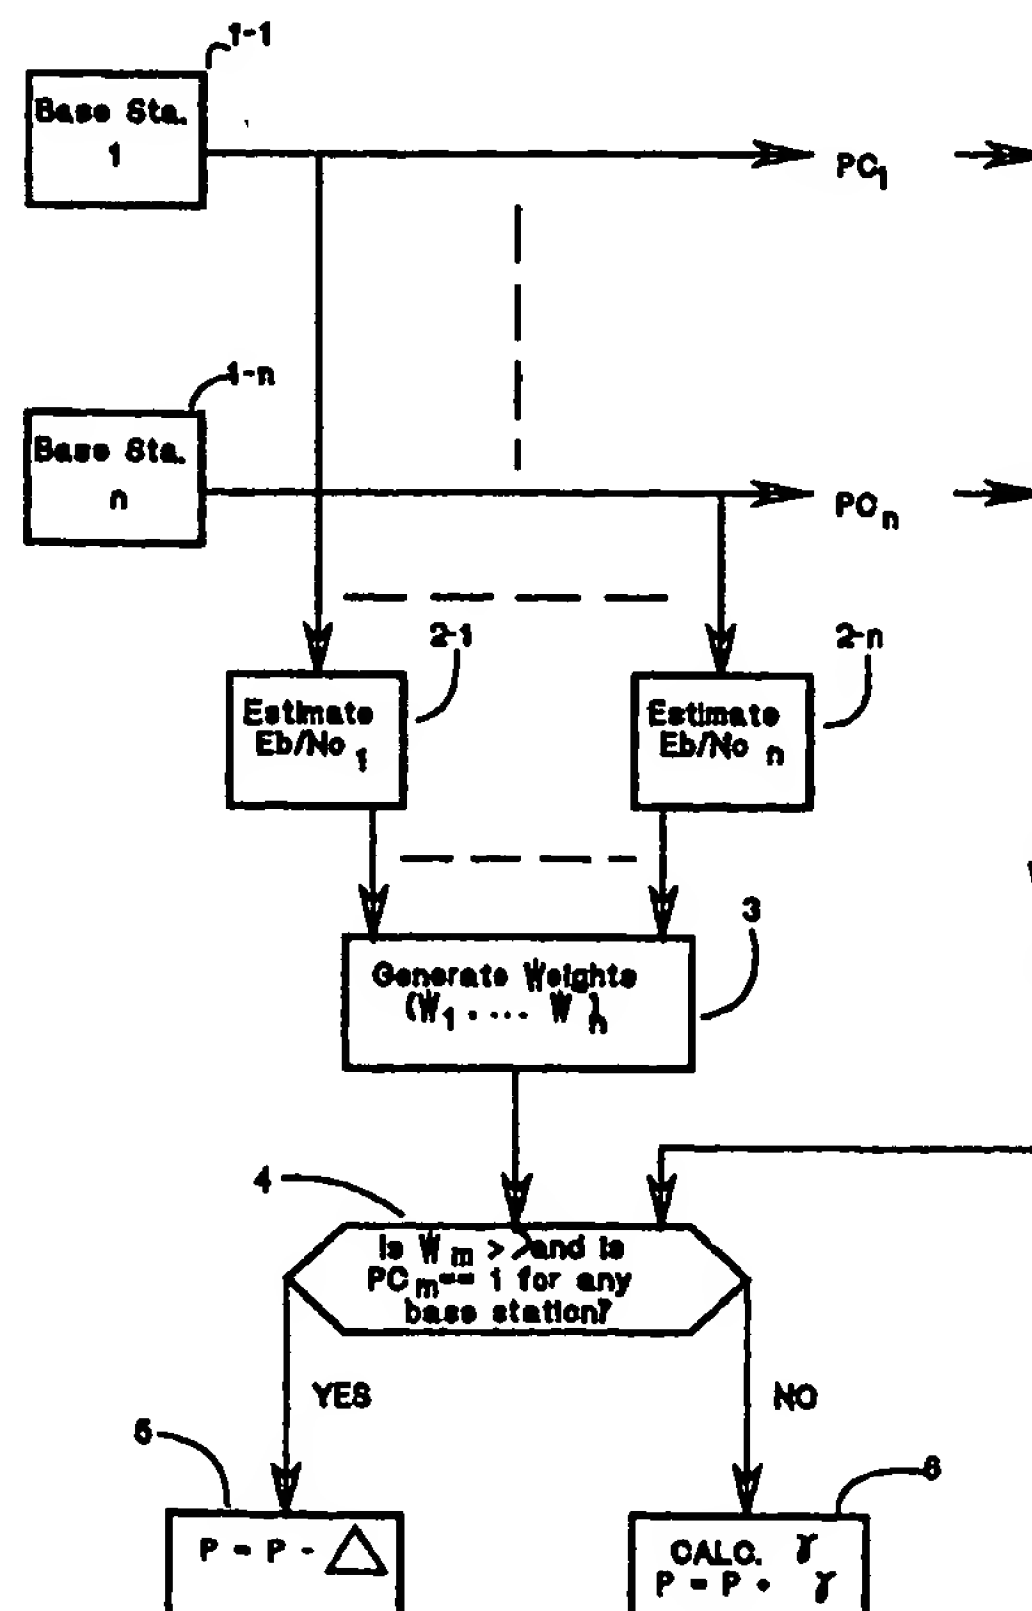

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

SYSTEM AND METHOD TO COMBINE POWER CONTROL COMMANDS DURING SOFT HANDOFF IN DS/CDMA CELLULAR SYSTEMS

FIELD OF THE INVENTION

5 The invention relates generally to DS/CDMA radio systems, and particularly to controlling the power output of mobile stations in DS/CDMA radio systems when they are in soft handoff and receiving power control commands from more than one base station.

BACKGROUND OF THE INVENTION

10 In cellular CDMA systems such as those governed by the IS-95A standard, a plurality of base stations are provided to service mobile users. The coverage areas of the base stations are known as cells. Cells typically overlap. A mobile user with a call in progress may travel toward the edge of a cell, and thus may enter an overlap area between two or more cells.

 The base stations monitor the power levels of signals received from mobile stations,
15 and may instruct each mobile station to increase or decrease its power to provide a power level sufficient to sustain communication but low enough to preclude interference with transmissions from other mobile stations.

 "Handoff" procedures are known in the art for passing a mobile user from one base station into another. A mobile station is said to undergo "hard handoff" if it disconnects its
20 transmission with the current base station and restarts transmission "from scratch" with a new base station. If the mobile station can communicate simultaneously with two or more base stations involved in the handoff it is said to be in "soft handoff". In this case each of the base stations sends power control commands to the mobile station.

 The conventional way for a mobile station to respond to these multiple power control
25 commands is to decrease its power if *any* of the base stations requests a decrease and to increase its power only if *all* the base stations so request. This is generally known as the "or of the downs" rule.

 In radio transmission, there are various difficulties encountered in maintaining a reliable communication link between a base and a mobile station. One of the frequently
30 encountered difficulties is the time-varying fluctuation of received signal strength, known as

fading, due to the nature of the radio transmission environment and the mobility of the mobile station. In fading channels, some of the radio link connections for either forward link (base station to mobile station) or reverse link (mobile station to base station) can be strong while the others can be weak. Furthermore, the multipath fading on the forward and reverse links may differ in their time-varying natures.

To control power on the reverse link, the power control commands are sent uncoded over the forward link to avoid the delay associated with decoding of coded information. Hence, the error rate for these commands is relatively higher than that for the information bits. In conventional DS/CDMA cellular systems, the forward link is designed such that the typical power control bit error rate is around 5% for a connection that would be considered a good connection. This rate can be higher if the received signal strength in the forward link is weaker than the nominal operating signal strength. This error rate can be lower if the power control bits are sent at extra power. Thus, with (i) the conventional combining method of "or of the downs" and (ii) this 5% error rate, the mobile station might erroneously decrease its transmit power even though all the base stations have asked for an increase in power, due to an error in transmission of a single power control command bit.

When the power control commands are erroneously interpreted at the mobile station and the mobile station acts in an opposite direction than desired, its impact on the system capacity can be significant since it might increase interference with signals from other mobile stations. The effective number of mobile stations (or mobile users) served by one base station can be reduced or the quality of service can be degraded. Furthermore, the mobile station can unnecessarily waste its limited battery power in trying to maintain a higher quality signal than required.

Cellular CDMA systems with significant traffic are known to be interference limited. Reducing interference results in an increase in the system capacity. One way to reduce interference is through power control. Power control is used in both the forward link (from base station to mobile) and reverse link (from mobile to base station). Reverse link power control has two parts: open loop and closed loop. The open loop is used to compensate for the effect of distance variations and shadowing which are usually reciprocal on both links (forward and reverse). Since the multipath fading conditions are independent on the forward

and the reverse links, the base station has to tell the mobile how to adjust its power to compensate for fading (closed loop).

When the received energy per bit over noise spectral density (E_b/N_0 , a widely used signal-to-noise ratio) from a mobile is higher than a target E_b/N_0 , the base station sends a power control command asking the mobile to decrease its transmitted power, and conversely when the received E_b/N_0 from a mobile is lower than a target E_b/N_0 , the base station requests the mobile to increase its transmitted power. A one-bit command is generally used for this purpose, e.g., a 1 requests decreasing the power while a 0 requests increasing the power by a fixed step Δ .

A large percentage of the time, a mobile can be in soft handoff, typically because of being in the region of overlap between two or more cells. During soft handoff, the mobile signal is received at different base stations and selective combining is performed to pick one of the signals to represent the mobile's signal on a frame-by-frame basis. In such a case, the mobile will be receiving power control commands from different base stations. To reduce the interference, the mobile applies the "or of the downs" rule, application of which is shown in Fig. 1.

The "or of the downs" rule would be the proper scheme if the received power control commands are error-free, since it minimizes the interference. In reality, however, the power control commands can be received in error.

There is thus a need for power control of CDMA mobile stations that is more accurately responsive to power control commands from the base stations when the transmission of power control commands is subject to errors in transmission.

It is thus an object of the present invention to improve Quality of Service (QoS) of the mobile stations.

It is another object of the present invention to provide CDMA mobile stations that respond to accurate power control commands and discriminate against inaccurate power control commands from base stations when the power control commands are subject to errors in transmission.

It is another object of the present invention to minimize interference during soft handoff.

It is another object of the present invention to reduce power consumption at a mobile station during soft handoff of the mobile station.

SUMMARY OF THE INVENTION

5 The present invention overcomes the drawbacks of the prior art and fulfills these and other objectives including minimizing interference during soft handoff, improving system capacity, and reducing power consumption of the mobile station's battery.

10 In an embodiment of the invention, instead of applying the "or of the downs" rule in a mobile station to respond to multiple power control commands from several participating base stations during soft handoff, the mobile station measures the quality of individual links in terms of received signal-to-interference-plus-noise ratio (SINR) and weights each received power control command in association with its link quality. A determination of power control is made from the weighted commands.

15 The invention will next be described in connection with certain exemplary embodiments; however, it should be clear to those skilled in the art that various modifications, additions and subtractions can be made without departing from the spirit or scope of the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

20 The invention will be more clearly understood by reference to the following detailed description of an exemplary embodiment in conjunction with the accompanying drawings, in which:

Fig. 1 (prior art) illustrates application of the "or of the downs" rule.

Fig. 2 illustrates the operation of the present invention.

DESCRIPTION OF THE INVENTION

25 During soft handoff, a mobile station receives and combines power control signals from all base stations participating in the soft handoff. One or more of these signals can be weak, which will result in a high error probability. Thus, through misinterpretation of weak power control commands, the mobile station can conceivably keep dropping its power even

30

though all base stations are asking for increased power. The strength of the signal depends on the path loss between the base station and the mobile and the number of Rake fingers (in a Rake receiver, known in the art) assigned to the signal. The mobile station has a limited number of fingers to assign to the different signals.

5 The invention provides a new scheme to combine the power control (PC) commands received in a mobile station during soft handoff. The mobile station measures the SINR received from a base station m participating in the soft handoff process, and based on the measurement assigns a weight (W_m) to the corresponding power control command. The mobile station combines all the power control commands according to a measure of
10 reliability associated with the weights. To reduce the interference, if any base station with a reliable connection asks for a decrease in power the mobile will decrease its power by a predetermined step size Δ . (A connection c is considered reliable if $W_c > \lambda$, where λ is a predetermined threshold).

 If no reliable signal is received requesting a decrease in power, the mobile adjusts its
15 power by γ , where $-\Delta \leq \gamma \leq \Delta$. For a practical implementation, γ may be chosen from a predetermined set of values.

 The scheme of the present invention is shown in Fig. 2 in the form of a flow chart which may be implemented in hardware, software, firmware, or a combination thereof.

 A mobile station communicating with n base stations receives signals from base
20 stations 1 through n . Included in the signals are Power Control (PC) bits PC_1 through PC_n , each having a value of 0 to indicate that the corresponding base station is requesting an increase in the mobile station's transmitting power, or a value of 1 to indicate a request for a decrease. However, as noted above, these bits may not have been received correctly. (Those skilled in the art will recognize that in alternative embodiments the opposite bit values could
25 have been employed, or that fields of more than a single bit may be employed.)

 Signal-to-Noise estimators 2-1 through 2- n estimate quality of transmission E_b/N_0 , through E_b/N_0_n for the base stations 1 through n . The quality estimate can be based on any transmitted signal from the base station from which the mobile station is able to accurately measure the channel condition between the base station and the mobile station. Weight

calculator 3 determines a weight W_1 through W_n for the quality of transmission from each base station according to the E_b/N_0 from each base station.

Decision block 4 determines whether, for *any* base station, the weight exceeds a predetermined threshold λ and if the Power Control bit was received as a 1. If yes (indicating
5 that a base station which is being reliably received requested a decrease in power), power is decreased by a predetermined amount Δ in block 5.

If decision block 4 does not find any reliable transmission of a request for power decrease, block 6 calculates γ (where $-\Delta \leq \gamma \leq \Delta$) as

$$\gamma = f(W_1, W_2, \dots, W_n, PC_1, PC_2, \dots, PC_n, \Delta)$$

10 and alters the transmitting power by γ . One possible function which has been used to calculate γ is as follows:

If $PC_i = 1$ (requesting decrease), $C_i = -1$

If $PC_i = 0$ (requesting increase), $C_i = 1$

$$W_T = W_1 + W_2 + \dots + W_n$$

$$x = W_1/W_T * C_1 + W_2/W_T * C_2 \dots + W_n/W_T * C_n$$

$$\gamma = x * \Delta$$

[Equation 1]

[Equation 2]

[Equation 3]

In another embodiment of the invention, the C_n bits are given values of +1 if the received PC bit indicates that the power should be increased or -1 if the power should be
20 decreased. A quality indicator W_1, W_2, \dots, W_n is computed for each PC bit. If the magnitude of the quality indicator is greater than a given threshold, the corresponding C_n bit remains unchanged. Otherwise, it is set to zero. This zero will be used to indicate that the power should be left unchanged. The power is decreased by Δ if any -1 is obtained. If there are no -1's but at least one +1, γ is determined as above according to Equations 1, 2, and 3, and the
25 power is increased by γ . If all the C_n bits are set to zero, the power is left unchanged.

In yet another embodiment of the invention, the received signal includes a power control field comprising a number m bits (where m is greater than 1). If the binary value contained in the power control field from a particular base station exceeds a predetermined threshold value, the corresponding C_n bit is set to +1. If the binary value is less than a second
30 threshold value lower than the first, the C_n bit is set to -1. If the binary value falls between the two threshold values, the C_n bit is set to 0. The power is then decreased by Δ if any -1 is

obtained. If there are no -1's and at least one +1, γ is calculated as above and the power is increased by γ . If all the C_n values are equal to 0, the power is left unchanged.

It will thus be seen that the invention efficiently attains the objects set forth above, among those made apparent from the preceding description. The invention provides

5 improved CDMA radio transmission, minimizes interference during soft handoff, and minimizes power consumption at the mobile station. Those skilled in the art will appreciate that the configuration depicted in Figure 2 improves the manner in which CDMA mobile stations assess and respond to the power control commands from base stations when the power control commands are subject to the possibility of errors in transmission.

10 It will be understood that changes may be made in the above construction and in the foregoing sequences of operation without departing from the scope of the invention. It is accordingly intended that all matter contained in the above description or shown in the accompanying drawings be interpreted as illustrative rather than in a limiting sense.

15 It is also to be understood that the following claims are intended to cover all of the generic and specific features of the invention as described herein, and all statements of the scope of the invention which, as a matter of language, might be said to fall therebetween.

Having described the invention, what is claimed as new and secured by Letters Patent is:

1. In a wireless communication system having base stations in communication with mobile stations, and in which the base stations communicate power control commands to the mobile stations for commanding the mobile stations to adjust their transmitting power, apparatus in the mobile stations for responding to the power control commands when a
5 mobile station is in communication with two or more base stations, the apparatus comprising:

quality estimating means for producing a quality estimate of the power control command from each base station;

10 evaluation means for determining an adjustment value determined as a function of the power control commands from the base stations and the quality estimates of the power control commands from the base stations;

comparison means for determining if the quality estimate of the power control command for each base station exceeds a predetermined threshold; and

15 power adjusting means for decreasing the transmitting power by a predetermined amount if a command to decrease power is received from any base station from which the quality estimate of the received command exceeds said predetermined threshold, and for adjusting the transmitting power according to said adjustment value if no command to decrease power is received with quality estimate exceeding said predetermined threshold from any base station.

20 2. The apparatus according to Claim 1 wherein said quality estimating means produces said quality estimate according to one of a channel SINR and a power control command SINR

3. The apparatus according to Claim 1 wherein said evaluation means includes:

means for determining a summation of the quality estimates for all of the base stations;

means for determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates wherein:

for a base station commanding a decrease in power said weighted value is made negative;

means for determining a third value equal to a sum of said weighted values, wherein said adjustment value is equal to a product of said predetermined amount and said third value.

4. The apparatus according to Claim 1 wherein said evaluation means includes:

means for determining a summation of the quality estimates for all of the base stations;

means for determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates and multiplied by:

zero for a base station for which said quality estimate does not exceed said predetermined threshold,

minus one for a base station commanding a decrease in power, and for which said quality estimate exceeds said predetermined threshold, or

plus one for a base station commanding an increase in power, and for which said quality estimate exceeds said predetermined threshold;

means for determining a third value equal to a sum of said weighted values and

means for determining said adjustment value equal to a product of said predetermined amount and said third value.

5. The apparatus according to Claim 1 wherein said comparison means further determines whether said quality estimate of said power control command from each base station exceeds a second predetermined threshold which is less than the first predetermined threshold,

5 and said evaluation means includes:

means for determining a summation of the quality estimates for all of the base stations;

means for determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates and multiplied by:

10 zero for a base station for which said quality estimate exceeds said second predetermined threshold and does not exceed said predetermined threshold, minus one for a base station for which said quality estimate is less than said second predetermined threshold, or

15 plus one for a base station for which said quality estimate exceeds said predetermined threshold;

means for determining a third value equal to a sum of said weighted values; and

means for determining said adjustment value equal to a product of said predetermined amount and said third value.

6. The apparatus according to Claim 1 wherein said power control commands from said base stations each take a value from a predetermined set of values, and said evaluation means includes:

5 means for determining a summation of the quality estimates for all of the base stations;
means for determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates and multiplied by:
plus one for a base station for which said value of said power control
10 command exceeds a first predetermined threshold value;
minus one for a base station for which said value of said power control command fails to equal or exceed a second predetermined threshold value lower than the first predetermined threshold value; or
zero for a base station for which said value of said power control command
15 exceeds said second predetermined threshold value but fails to exceed said first predetermined threshold value;
means for determining a third value equal to a sum of said weighted values; and
means for determining said adjustment value equal to a product of said predetermined amount and said third value.

20

7. In a wireless communication system having base stations in communication with mobile stations, and in which the base stations send at least power control commands for commanding mobile stations to increase or decrease their transmitting power, a method practiced in the mobile stations for responding to said power control commands
25 when a mobile station is in communication with two or more base stations, the method comprising the steps of:

producing a quality estimate of the power control command from each base station;
determining an adjustment value being a function of the power control commands from the base stations and the quality estimates of the power control commands
30 from the base stations;

determining if the quality estimate of the power control command from each base station exceeds a predetermined threshold; and
adjusting the transmitting power by a predetermined amount if a command to decrease power is received from any base station from which the quality estimate of the received command exceeds said predetermined threshold and adjusting the transmitting power according to said adjustment value if no command to decrease power is received with a quality estimate exceeding said predetermined threshold from any base station.

- 5
- 10 8. The method according to Claim 7 wherein said step of producing a quality estimate produces said quality estimate according to one of a channel SINR and a power control command SINR
- 15 9. The method according to Claim 7 wherein said step of determining an adjustment value includes:
- 20 determining a summation of the quality estimates for all of the base stations;
determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates and multiplied by:
minus one for a base station commanding a decrease in power, or
plus one for a base station commanding an increase in power;
determining a third value equal to a sum of said weighted values; and
determining said adjustment value equal to a product of said predetermined amount and said third value.

10. The method according to Claim 7 wherein said step of determining an adjustment value includes:

determining a summation of the quality estimates for all of the base stations;

determining for each base station a weighted value equal to the quality estimate

5 divided by said summation of the quality estimates and multiplied by:

zero for a base station for which said quality estimate does not exceed said predetermined threshold,

minus one for a base station commanding a decrease in power, and for which said quality estimate exceeds said predetermined threshold, or

10 plus one for a base station commanding an increase in power, and for which said quality estimate exceeds said predetermined threshold;

determining a third value equal to a sum of said weighted values; and

determining said adjustment value equal to a product of said predetermined amount and said third value.

11. The method according to Claim 7 wherein said step of determining if said quality estimate of the power control command from each base station exceeds a predetermined threshold further determines whether said quality estimate of said power control command
5 from each base station exceeds a second predetermined threshold lower than the predetermined threshold,

and said step of determining adjustment value includes:

determining a summation of the quality estimates for all of the base stations;
determining for each base station a weighted value equal to the quality estimate
10 divided by said summation of the quality estimates and multiplied by:
zero for a base station for which said quality estimate exceeds said second predetermined threshold and does not exceed said predetermined threshold,
minus one for a base station for which said quality estimate is less than said
second predetermined threshold, or
15 plus one for a base station for which said quality estimate exceeds said predetermined threshold;
determining a third value equal to a sum of said weighted values; and
determining said adjustment value equal to a product of said predetermined amount
and said third value.

12. The method according to Claim 7 wherein said power control commands from said base stations each take a value from a predetermined set of values,

and said step of determining an adjustment value includes:

determining a summation of the quality estimates for all of the base stations;

5 determining for each base station a weighted value equal to the quality estimate divided by said summation of the quality estimates and multiplied by:

plus one for a base station for which said value of said power control command exceeds a first predetermined threshold value;

minus one for a base station for which said value of said power control

10 command fails to equal or exceed a second predetermined threshold value lower than the first predetermined threshold value; or

zero for a base station for which said value of said power control command exceeds said second predetermined threshold value but fails to exceed said first predetermined threshold value;

15 determining a third value equal to a sum of said weighted values; and

determining said adjustment value equal to a product of said predetermined amount and said third value.

13. In a wireless communication system having base stations in communication with mobile stations, and in which the base stations communicate power control commands to the mobile stations for commanding the mobile stations to adjust their transmitting power, apparatus in the mobile stations for responding to the power control commands when a mobile station is in communication with two or more base stations, the apparatus comprising an arithmetic logic unit (ALU) adapted to:

25 produce a quality estimate of the power control command from each base station;

determine an adjustment value determined as a function of the power control commands from the base stations and the quality estimates of the power control commands from the base stations;

30 determine if the quality estimate of the power control command for each base station exceeds a predetermined threshold; and

command decreasing the transmitting power by a predetermined amount if a
command to decrease power is received from any base station from which the
quality estimate of the received command exceeds said predetermined threshold,
and command adjusting the transmitting power according to said adjustment value
5 if no command to decrease power is received with quality estimate exceeding said
predetermined threshold from any base station.

14. The apparatus according to Claim 13 wherein quality estimate is produced according to
one of a channel SINR and a power control command SINR
10

15. The apparatus according to Claim 13 wherein:

a summation of the quality estimates for all of the base stations is determined;
for each base station a weighted value is determined equal to the quality estimate
divided by said summation of the quality estimates wherein:

15 for a base station commanding a decrease in power said weighted value is
made negative;

a third value is determined equal to a sum of said weighted values, wherein said
adjustment value is equal to a product of said predetermined amount and said third
value.

16. The apparatus according to Claim 13 wherein:

a summation of the quality estimates for all of the base stations is determined;

for each base station a weighted value is determined equal to the quality estimate

divided by said summation of the quality estimates and multiplied by:

zero for a base station for which said quality estimate does not exceed said
predetermined threshold,

minus one for a base station commanding a decrease in power, and for which
said quality estimate exceeds said predetermined threshold, or

plus one for a base station commanding an increase in power, and for which
said quality estimate exceeds said predetermined threshold;

a third value is determined equal to a sum of said weighted values and

said adjustment value is determined equal to a product of said predetermined amount
and said third value.

17. The apparatus according to Claim 13 wherein said ALU determines whether said quality
estimate of said power control command from each base station exceeds a second
predetermined threshold which is less than the first predetermined threshold, and

a summation of the quality estimates for all of the base stations is determined;

for each base station a weighted value is determined equal to the quality estimate

divided by said summation of the quality estimates and multiplied by:

zero for a base station for which said quality estimate exceeds said second
predetermined threshold and does not exceed said predetermined threshold,

minus one for a base station for which said quality estimate is less than said
second predetermined threshold, or

plus one for a base station for which said quality estimate exceeds said
predetermined threshold;

a third value is determined equal to a sum of said weighted values; and

said adjustment value is determined equal to a product of said predetermined amount
and said third value.

18. The apparatus according to Claim 13 wherein said power control commands from said base stations each take a value from a predetermined set of values, and said ALU is adapted to:

- 5 determine a summation of the quality estimates for all of the base stations;
determine for each base station a weighted value equal to the quality estimate divided
by said summation of the quality estimates and multiplied by:
- 10 plus one for a base station for which said value of said power control
command exceeds a first predetermined threshold value;
minus one for a base station for which said value of said power control
15 command fails to equal or exceed a second predetermined threshold value
lower than the first predetermined threshold value; or
zero for a base station for which said value of said power control command
exceeds said second predetermined threshold value but fails to exceed said
first predetermined threshold value;
- 15 determine a third value equal to a sum of said weighted values; and
determine said adjustment value equal to a product of said predetermined amount and
said third value.

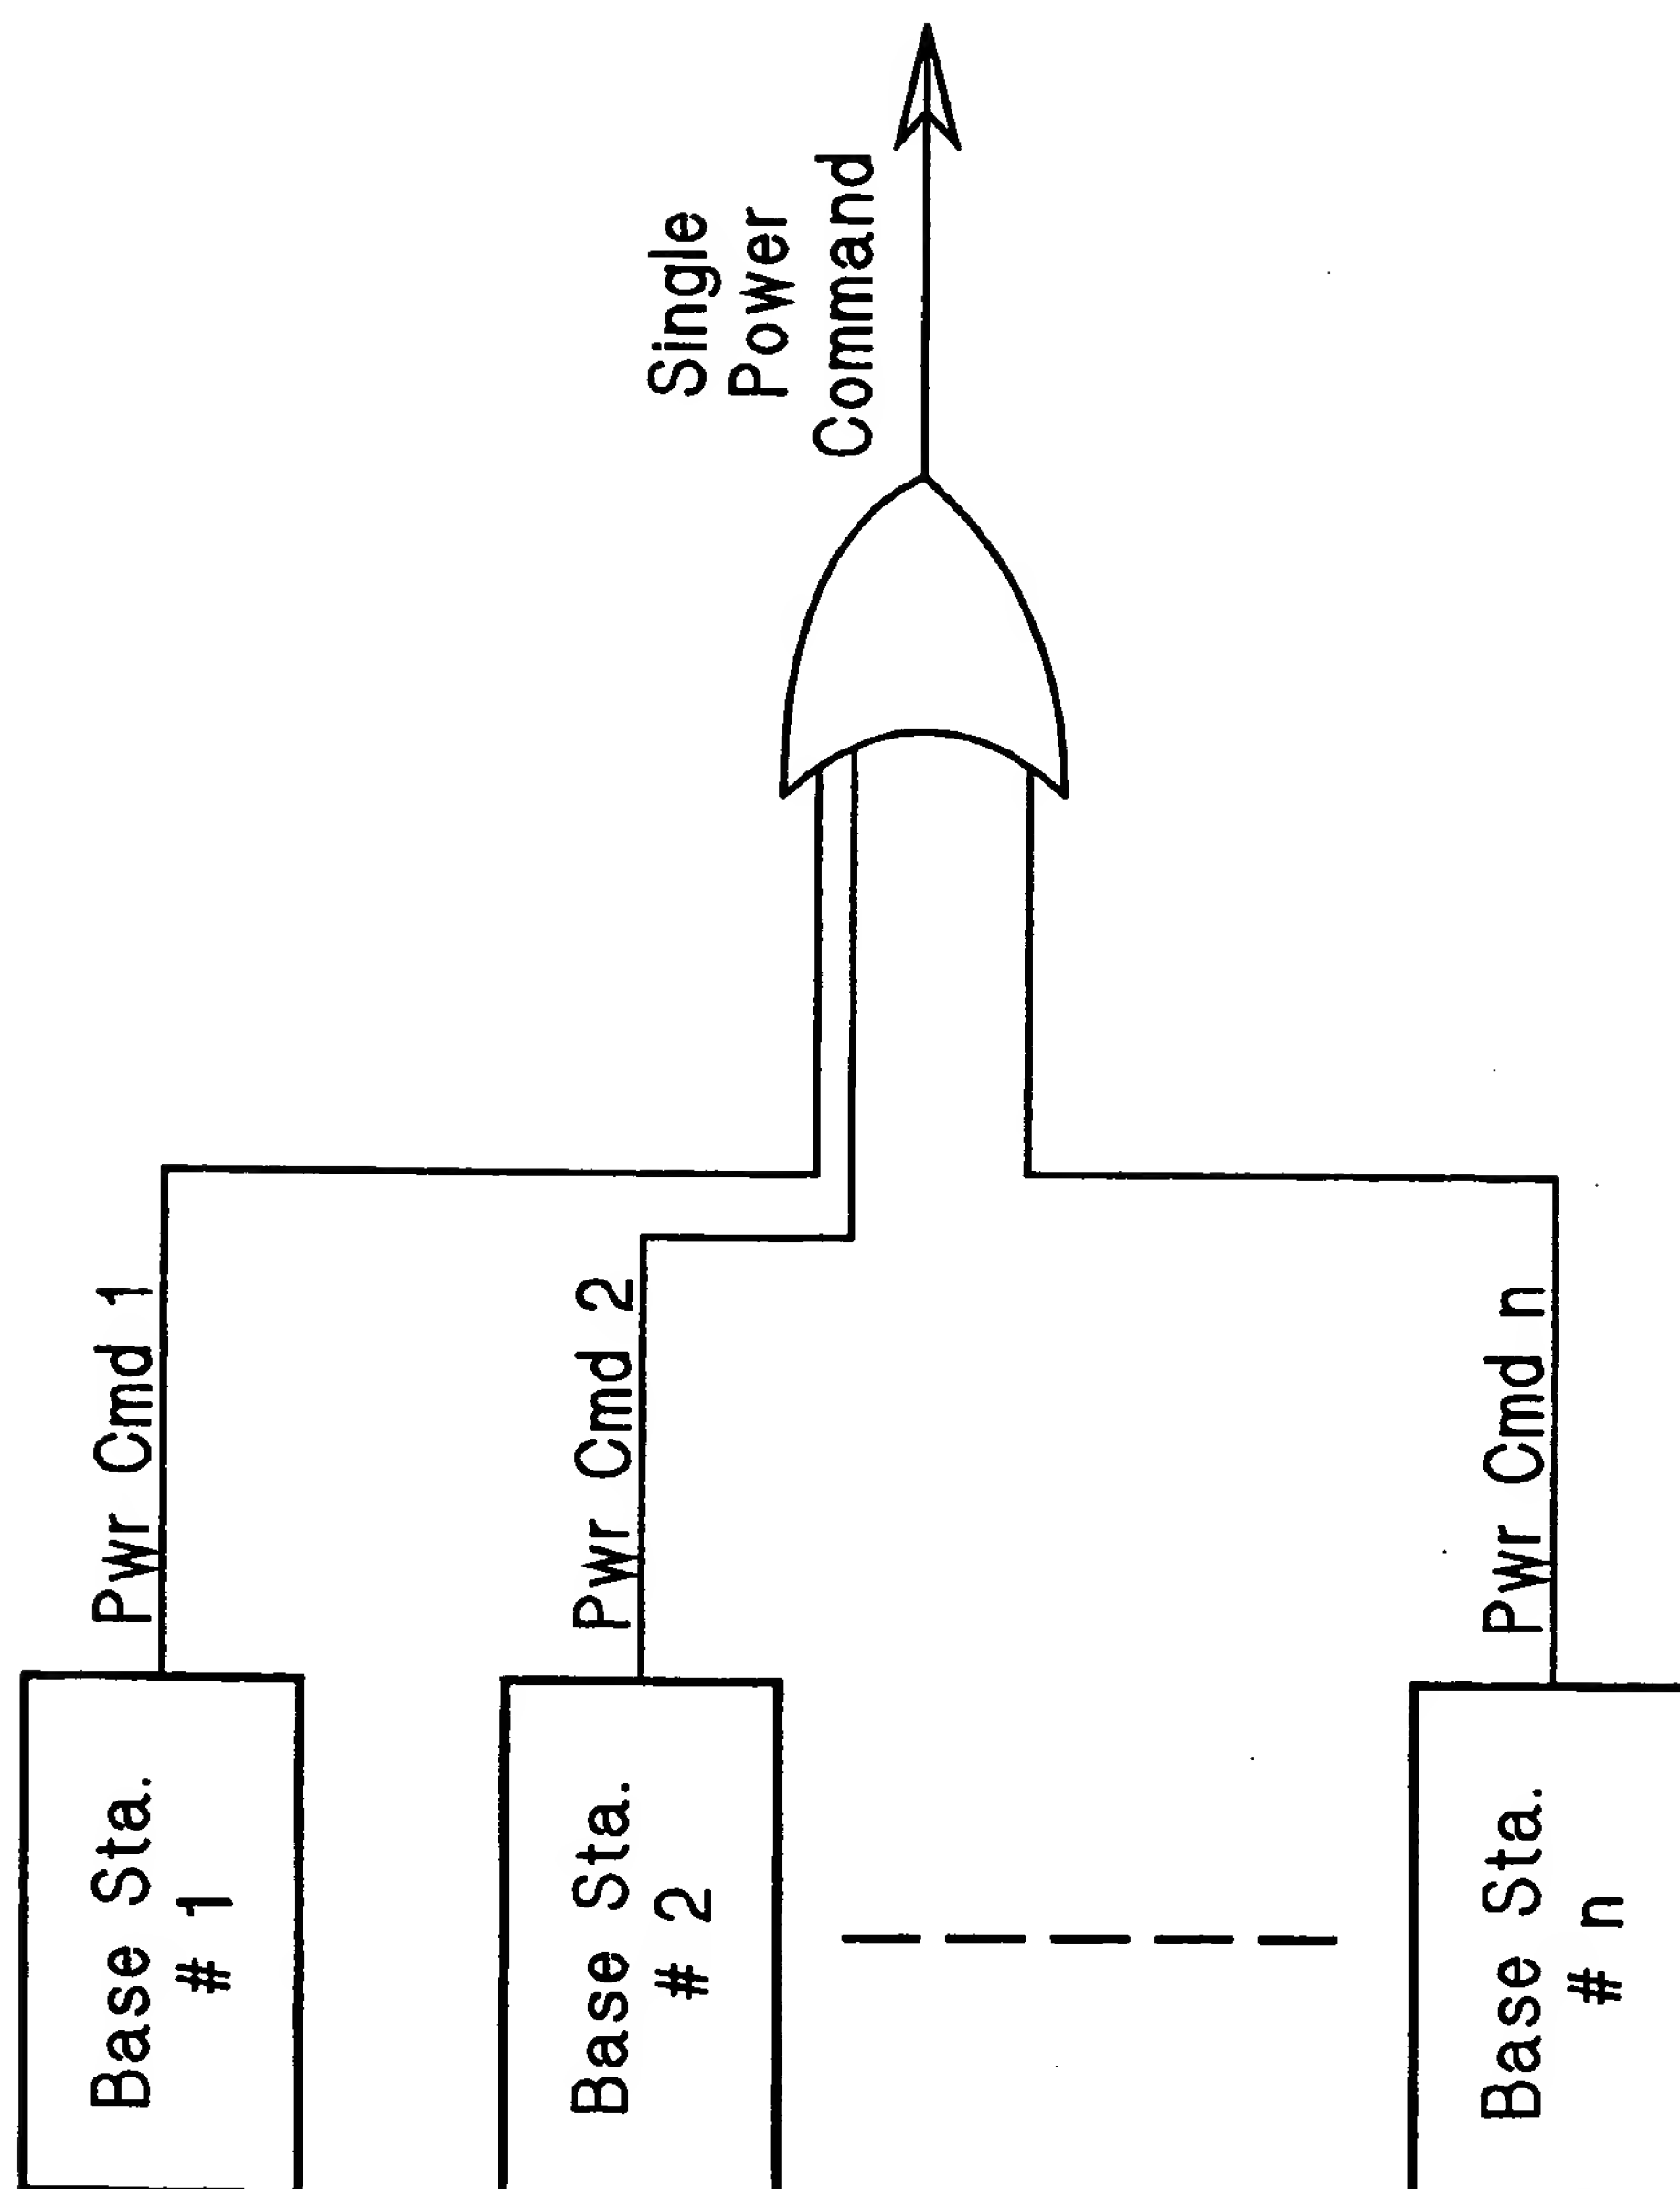


Fig. 1
(Prior art)

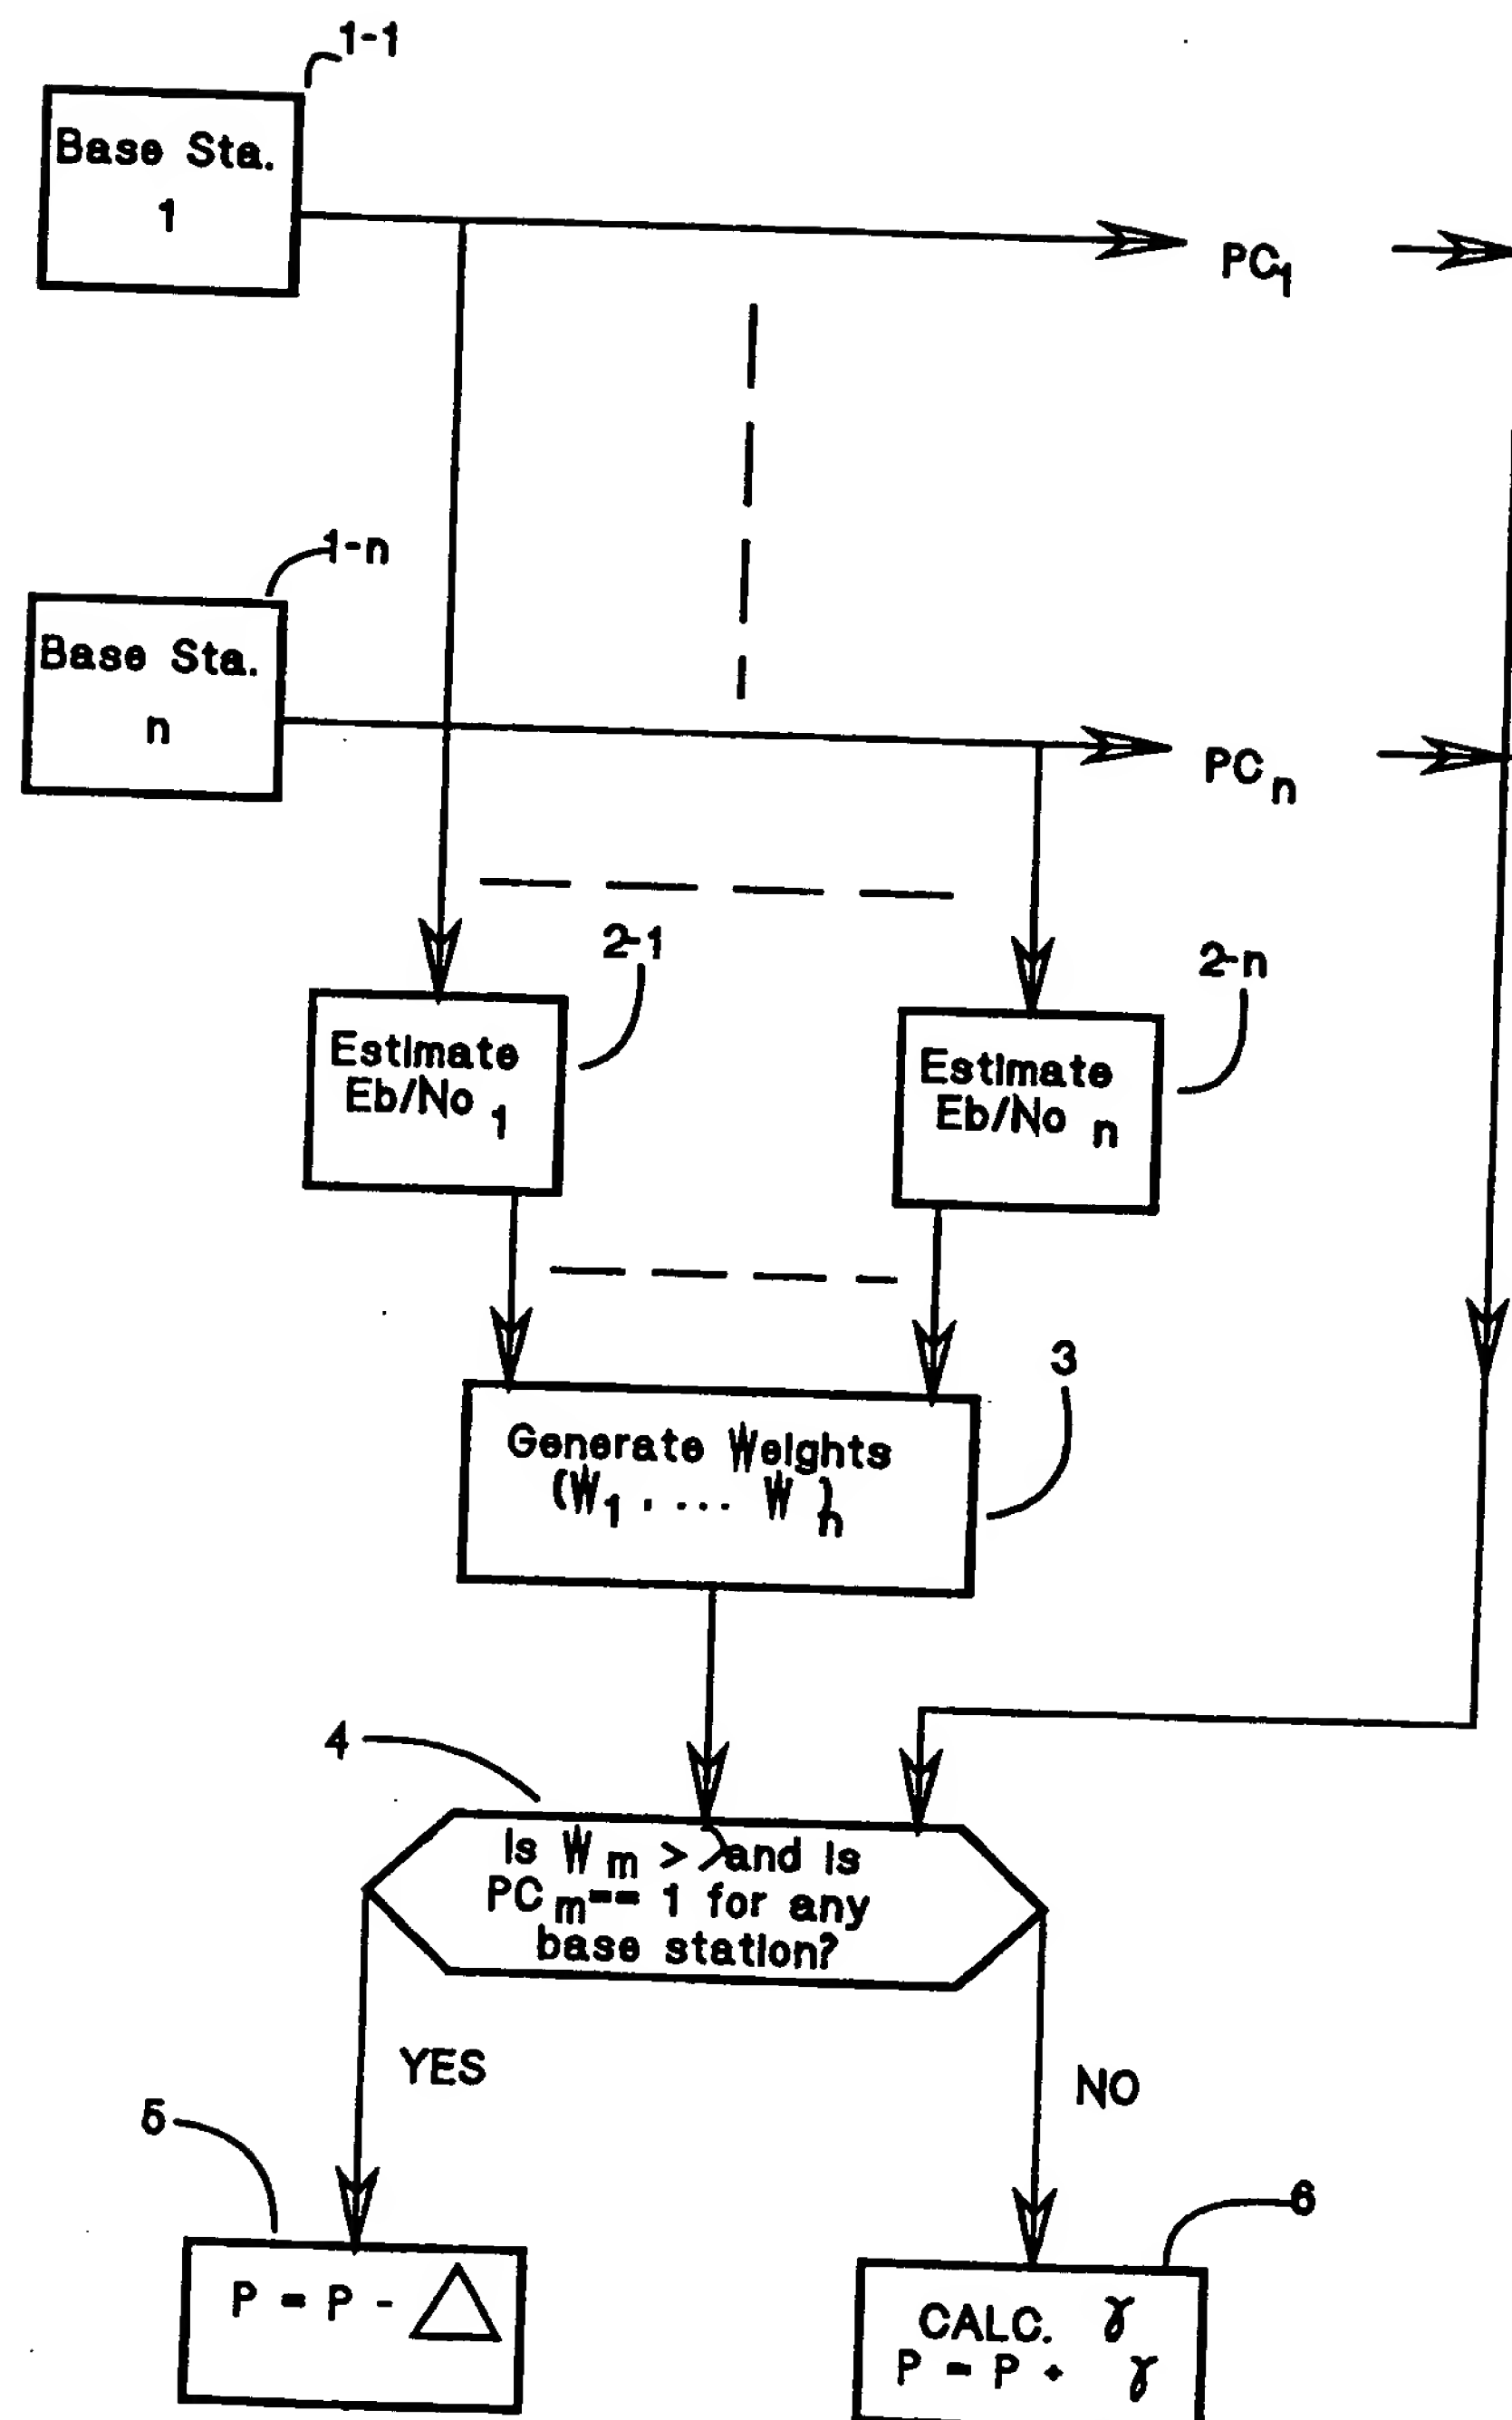


Fig. 2

INTERNATIONAL SEARCH REPORT

Int .tional Application No
PCT/IB 99/01936

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04B7/005

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 680 160 A (NIPPON TELEGRAPH & TELEPHONE) 2 November 1995 (1995-11-02) abstract column 2, line 36 -column 5, line 35 column 6, line 2 -column 7, line 33 claims 1,3,5,7,9,11,13-15 ---	1,7,18
A	EP 0 645 940 A (NIPPON TELEGRAPH & TELEPHONE) 29 March 1995 (1995-03-29) column 3, line 35 -column 4, line 11 column 4, line 37 -column 5, line 17 column 7, line 10 -column 8, line 26 claims 7,10,13,18 --- -/--	1,7,18

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

7 March 2000

Date of mailing of the international search report

22/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Gkell, M

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/IB 99/01936

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 817 400 A (NIPPON ELECTRIC CO) 7 January 1998 (1998-01-07) column 4, line 14 - line 34 column 5, line 54 -column 6, line 28 claims 1-4 figures 3,7A,7B,9A,9B</p> <p>---</p>	1,7,18
A	<p>EP 0 809 365 A (NIPPON TELEGRAPH & TELEPHONE) 26 November 1997 (1997-11-26) column 5, line 14 - line 46 column 7, line 25 -column 8, line 23 column 9, line 3 -column 10, line 25 column 12, line 12 -column 13, line 46 column 14, line 53 -column 15, line 31 claims 1-5,7</p> <p>-----</p>	1,7,18

INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. Patent Application No

PCT/IB 99/01936

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0680160 A	02-11-1995	JP 2904335 B	14-06-1999
		JP 8018503 A	19-01-1996
		CA 2147922 A	28-10-1995
		CN 1115555 A	24-01-1996
EP 0645940 A	29-03-1995	JP 2911090 B	23-06-1999
		JP 7107033 A	21-04-1995
		US 5574983 A	12-11-1996
EP 0817400 A	07-01-1998	JP 2839014 B	16-12-1998
		JP 10022975 A	23-01-1998
		AU 2849697 A	15-01-1998
		CA 2209729 A	05-01-1998
EP 0809365 A	26-11-1997	JP 9312871 A	02-12-1997
		CA 2205714 A	22-11-1997
		CN 1166760 A	03-12-1997
		DE 69700858 D	05-01-2000
		US 5878350 A	02-03-1999

THIS PAGE BLANK (USPTO)